


EUROPEAN OAK (PEFC-CERTIFIED)

PROFILE: FINE LINE with QuickClip® – SV3QC

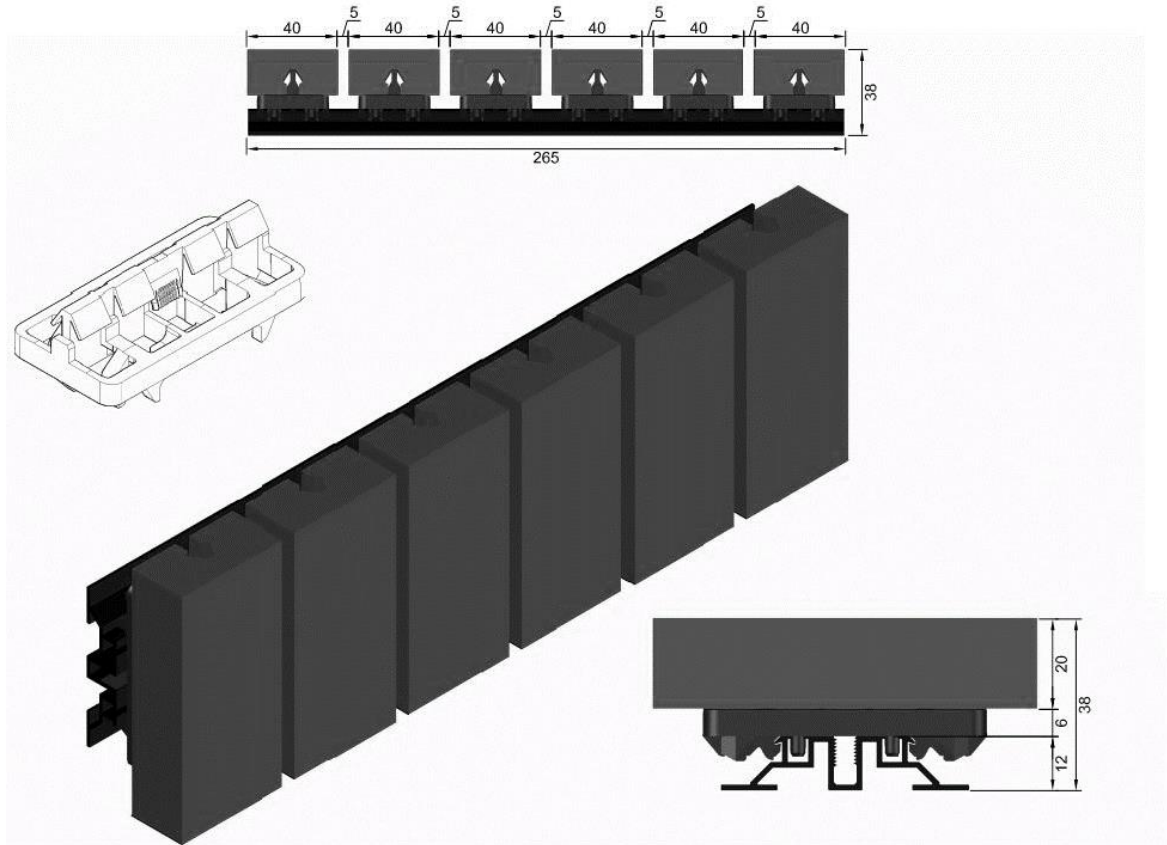

PROFILE DIMENSIONS

H 20 x W 40 x L ± 2700 | 3000 | 3300 | 3600 | 3900 | 4200mm

DIMENSIONS OF ALUMINIUM JOIST WITH PRE-MOUNTED CLIPS

H 12 x W 55 x L ± 3600 - 3900mm

TOTAL HEIGHT: 38mm (profile 20 mm + clip 6mm + alu joist 12mm)

DURABILITY CLASS 2 – 3 (Catas certificate available upon request)

Indoor use: 12 – 14 % moisture content

Outdoor use: 14 – 16 % moisture content

Density: 760kg/m³ at 12 % moisture content

Description:

Timber cladding in European oak, PEFC-certified, dimensions:

thickness: 20mm; width: 40mm, installed using Carpentier QuickClip® system.

Reverse side has 5.8mm x 11.8mm groove for easy installment of QuickClip® (polyoxymethylene).

European oak is durability class 2-3 timber with 12-14 % moisture content for indoor use, 14-16 % for outdoor use, and density of 760kg/m³ at 12 % moisture content. All plastic clips are spaced at 45mm apart and PRE-installed on a black painted aluminium rail, RAL9005, with the following dimensions: thickness 12mm, width 55mm and length $\pm 3,600$ - 3,900mm. Total height of construction 38mm.

Installation instructions: please request our separate document