


HOTWOOD BAMBOO (THERMALLY TREATED BAMBOO – PEFC-CERTIFIED)

PROFILE: FINE LINE with QuickClip® – SV3QC

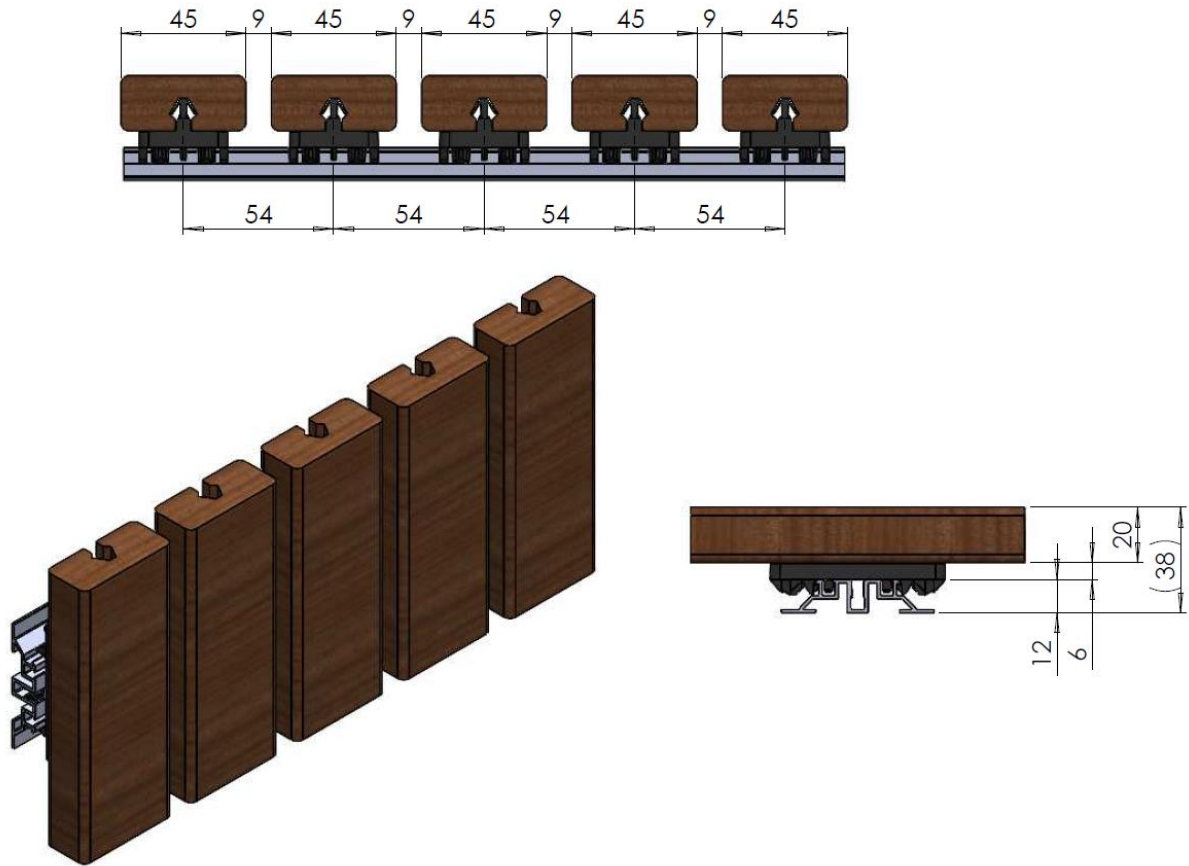

PROFILE DIMENSIONS

H 20 x W 45 x L ± 1850 mm

DIMENSIONS OF ALUMINIUM JOIST WITH PRE-MOUNTED CLIPS

H 12 x W 55 x L 3960mm

TOTAL HEIGHT: 38mm (profile 20mm + clip 6mm + alu joist 12mm)

DURABILITY CLASS 1

Bending strength: 54.4N/mm^2 | Modulus of elasticity: $13,565\text{N/mm}^2$ | Density: 1150kg/m^3 |

Dimensional stability: length: + 0.1 %; width: + 0.9% (24 hours in water 20°C)

Description:

Timber cladding in HOTwood bamboo, PEFC-certified, dimensions:

thickness: 20mm; width: 45mm, installed using Carpentier QuickClip® system.

Reverse side has 5.8mm x 11.8mm groove for easy installment of QuickClip® (polyoxymethylene).

HOTwood bamboo is durability class 1 timber with bending strength of 54.4N/mm^2 , modulus of elasticity of $13,565\text{N/mm}^2$ and density of 1150kg/m^3 . All plastic clips are spaced at 62mm apart and PRE-installed on a black painted aluminium rail, RAL9005, with the following dimensions: thickness 12mm, width 55mm and length 3960mm. Total height of construction is 38mm.

Installation instructions: please request our separate document