


HOTWOOD PINE (THERMALLY TREATED PINE – PEFC-CERTIFIED)

PROFILE: CUBUS with QuickClip® – CBQC – interval of 38mm

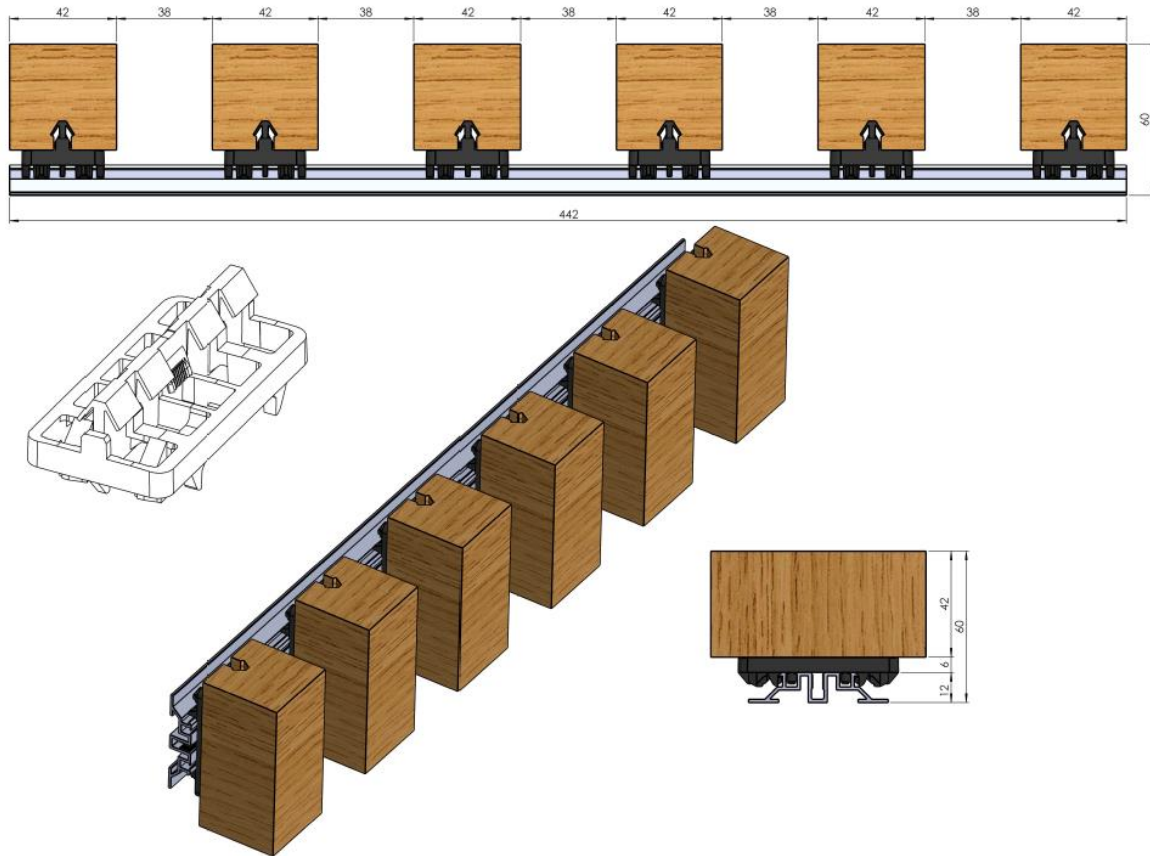

PROFILE DIMENSIONS

H 42 x W 42 x L ± 2700 | 3000 | 3300 | 3600 | 3900 | 4200mm

DIMENSIONS OF ALUMINIUM JOIST WITH PRE-MOUNTED CLIPS

H 12 x W 55 x L ± 4000 mm

TOTAL HEIGHT: 60mm (profile 42mm + clip 6mm + alu joist 12mm)

DURABILITY CLASS 1-2 (Catas certificate available upon request)

4-6% moisture content | Bending strength: 17.41 | Modulus of elasticity: 3.44 | Density: 415,5 kg/m³ | Width shrinkage for EMC 35 - 65%: 0.39%

Description:

Timber cladding in HOTwood pine, PEFC-certified, dimensions:

thickness: 42mm; width: 42mm, installed using Carpentier QuickClip® system.

Reverse side has 5.8mm x 11.8mm groove for easy installment of QuickClip® (polyoxymethylene).

HOTwood pine is durability class 1-2 timber with moisture content of 4-6%, bending strength of 17.41, modulus of elasticity of 3.44 and density of 415.5 kg/m³. All plastic clips are spaced at 82mm apart and PRE-installed on a black painted aluminium rail, RAL9005, with the following dimensions: thickness 12mm, width 55mm and length ± 4000 mm. Total height of construction 60mm.

Installation instructions: please request our separate document