


HOTWOOD PINE (THERMALLY TREATED PINE – PEFC-CERTIFIED)

PROFILE: RELIEF with QuickClip® – RELQC

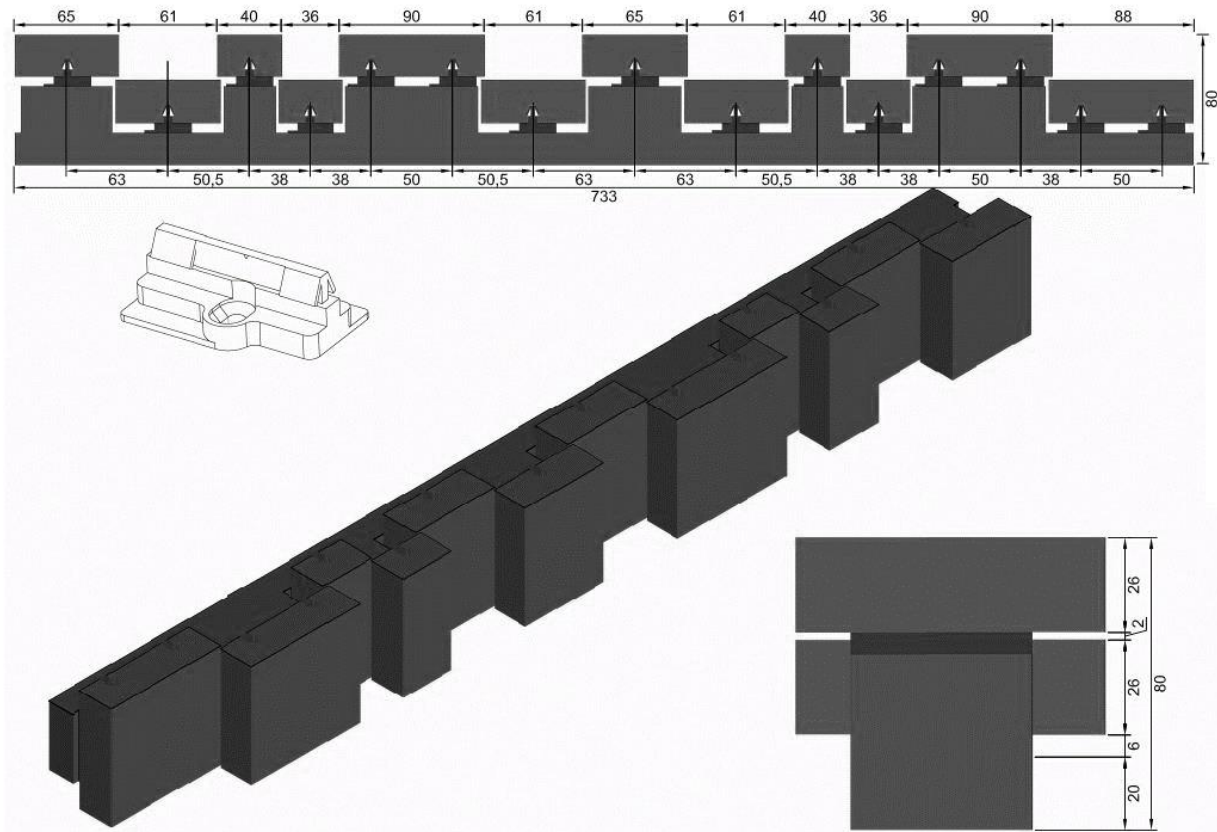

PROFILE DIMENSIONS

H 26 x W 40 | 65 | 90 x L ±2700 | 3000 | 3300 | 3600 | 3900 | 4200mm

DIMENSIONS OF TIMBER JOIST WITH PRE-MOUNTED CLIPS

H 48 x W 50 x 3600mm

TOTAL HEIGHT: 80mm

(profile 26mm + leeway mm + profile 26mm + clip 6mm + timber joist 20mm)

DURABILITY CLASS 1-2 (Catas certificate available upon request)

4-6% moisture content | Bending strength: 17.41 | Modulus of elasticity: 3.44 | Density: 415,5 kg/m³ | Width shrinkage for EMC 35 - 65%: 0.39%

Description:

Timber cladding in HOTwood pine, PEFC-certified, dimensions:

thickness: 26mm; width: 40|65|90mm, installed using Carpentier QuickClip® system.

Reverse side has 5.8mm x 11.8mm groove for easy installment of QuickClip® (polyoxymethylene).

HOTwood pine is durability class 1-2 timber with moisture content of 4-6%, bending strength of 17.41, modulus of elasticity of 3.44 and density of 415.5 kg/m³. All plastic clips are spaced according to profile and PRE-installed on an impregnated wood rail, with the following dimensions: thickness 48mm, width 50mm and length 3600mm. Total height of construction 80mm.

Installation instructions: please request our separate document