


HOTWOOD PINE (THERMALLY TREATED PINE – PEFC-CERTIFIED)

PROFILE: PLUS LINE with QuickClip® – SV+QC – interval of 4mm

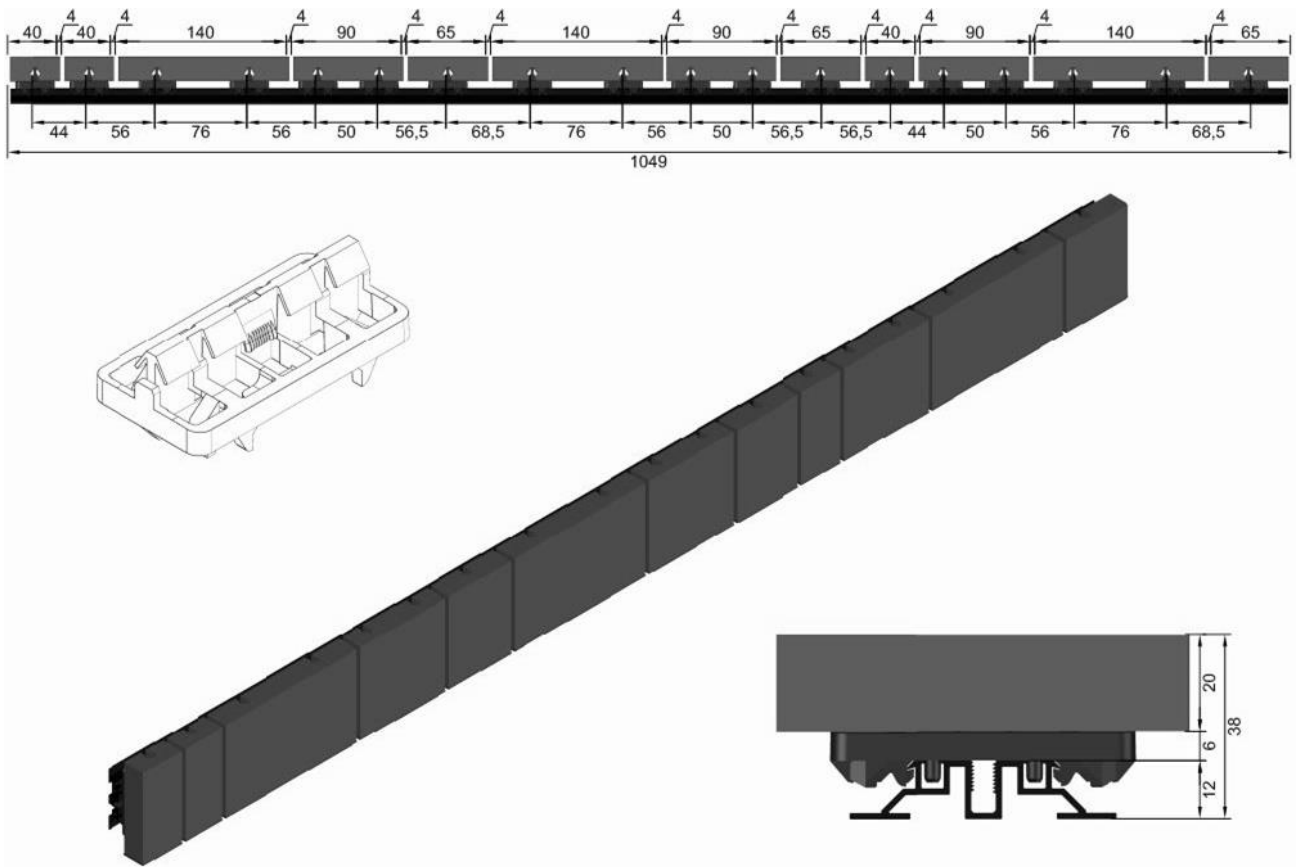

PROFILE DIMENSIONS

H 26 x W 40|65|90|140 x L ±2700|3000|3300|3600|3900|4200mm

DIMENSIONS OF ALUMINIUM JOIST WITH PRE-MOUNTED CLIPS

H 12 x W 55 x L ± 3600 - 3900mm

TOTAL HEIGHT: 38mm (profile 20mm + clip 6mm + alu joist 12mm)

DURABILITY CLASS 1-2 (Catas certificate available upon request)

4-6% moisture content | Bending strength: 17.41 | Modulus of elasticity: 3.44 | Density: 415,5 kg/m³ | Width shrinkage for EMC 35 - 65%: 0.39%

Description:

Timber cladding in HOTwood pine, PEFC-certified, dimensions:

thickness: 26mm; width: 40|65|90|140 mm, installed using Carpentier QuickClip® system.

Reverse side has 5.8mm x 11.8mm groove for easy installment of QuickClip® (polyoxymethylene).

HOTwood pine is durability class 1-2 timber with moisture content of 4-6%, bending strength of 17.41, modulus of elasticity of 3.44 and density of 415.5 kg/m³. All plastic clips are spaced according to profile and PRE-installed on a black painted aluminium rail, RAL9005, with the following dimensions: thickness 12mm, width 55mm and length ± 3,600 - 3,900mm. Total height of construction 38mm.

Installation instructions: please request our separate document