


**HOTWOOD PINE** (THERMALLY TREATED PINE – PEFC-CERTIFIED)

PROFILE: FINE LINE with QuickClip® – SV3QC

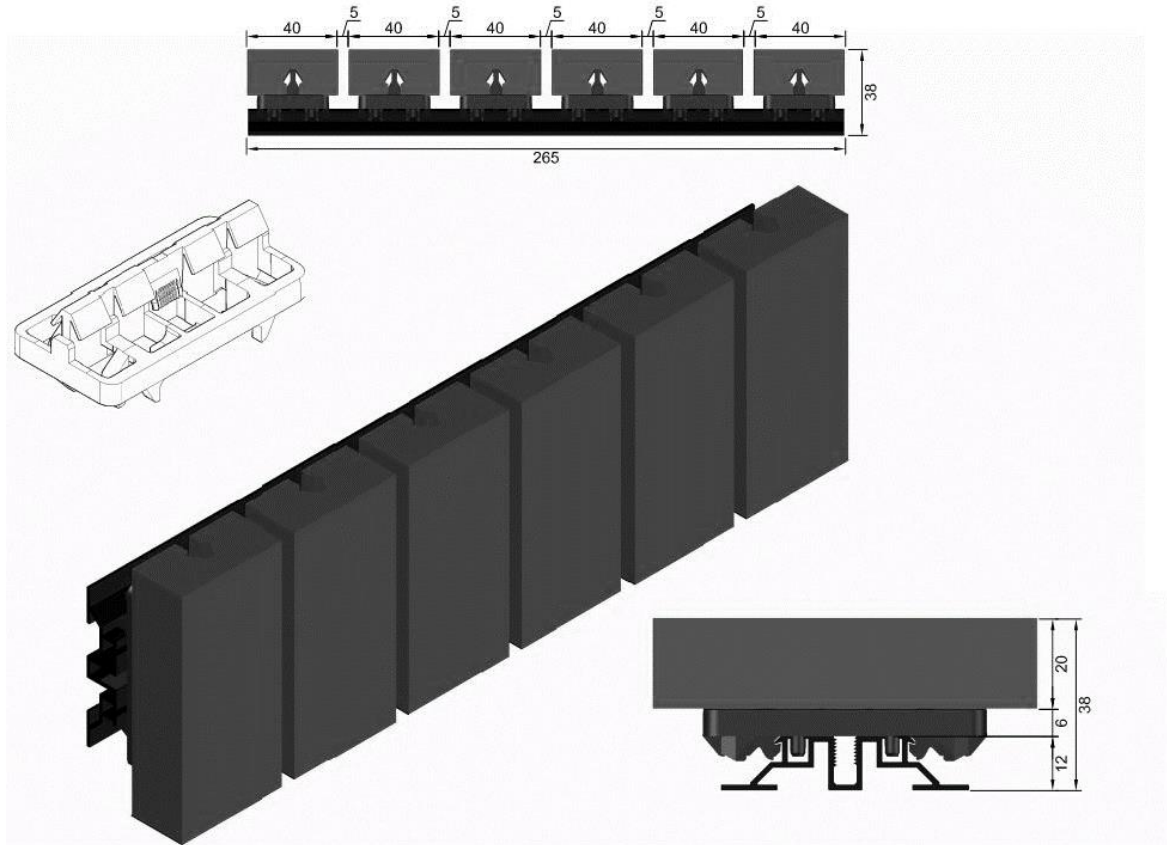

## PROFILE DIMENSIONS

H 20 x W 40 x L  $\pm 2700$  | 3000 | 3300 | 3600 | 3900 | 4200mm

## DIMENSIONS OF ALUMINIUM JOIST WITH PRE-MOUNTED CLIPS

H 12 x W 55 x L  $\pm 3600$  - 3900mm

TOTAL HEIGHT: 38mm (profile 20 mm + clip 6mm + alu joist 12mm)

## DURABILITY CLASS 1-2 (Catas certificate available upon request)

4-6% moisture content | Bending strength: 17.41 | Modulus of elasticity: 3.44 | Density: 415,5 kg/m<sup>3</sup> | Width shrinkage for EMC 35 - 65%: 0.39%

## Description:

Timber cladding in HOTwood pine, PEFC-certified, dimensions:

thickness: 20mm; width: 40mm, installed using Carpentier QuickClip® system.

Reverse side has 5.8mm x 11.8mm groove for easy installment of QuickClip® (polyoxymethylene).

HOTwood pine is durability class 1-2 timber with moisture content of 4-6%, bending strength of 17.41, modulus of elasticity of 3.44 and density of 415.5 kg/m<sup>3</sup>. All plastic clips are spaced at 45mm apart and PRE-installed on a black painted aluminium rail, RAL9005, with the following dimensions: thickness 12mm, width 55mm and length  $\pm 3,600$  - 3,900mm. Total height of construction 38mm.

**Installation instructions: please request our separate document**