


EUROPEAN OAK (PEFC-CERTIFIED)

PROFILE: SMOOTH REBATED FEATHER EDGE – 4-SIDED T&G – RS1

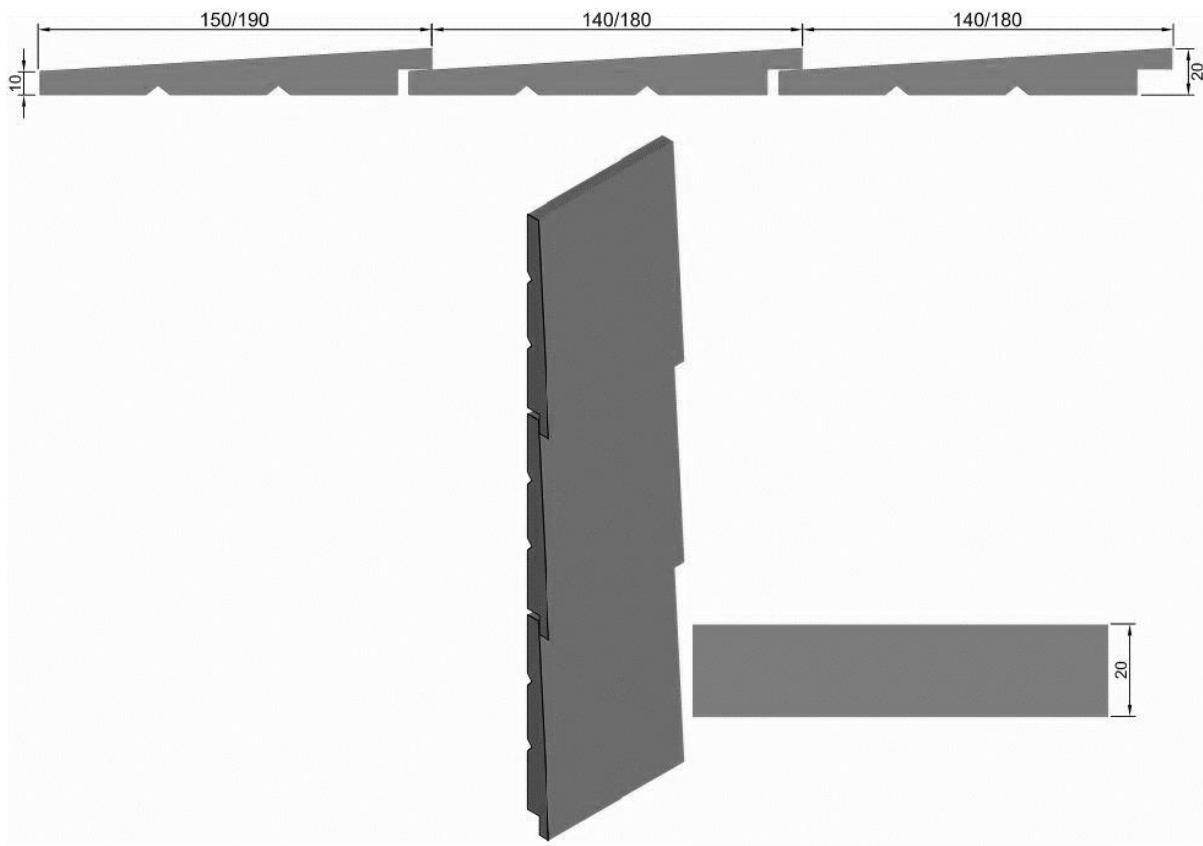

PROFILE DIMENSIONS

H 10/20 x W 150 | 190 x L $\pm$ 1500 | 1800 | 2100 | 2500mm

Batten not included

H 20mm x W 50mm

TOTAL HEIGHT: 40mm (profile 20mm, batten 20mm)

DURABILITY CLASS 2 – 3 (Catas certificate available upon request)

Indoor use: 12 – 14 % moisture content

Outdoor use: 14 – 16 % moisture content

Density: 760kg/m³ at 12 % moisture content

Description:

Timber cladding in European oak, PEFC-certified, dimensions:

thickness: 10/20mm; width: 150 | 190mm.

European oak is durability class 2-3 timber with 12-14 % moisture content for indoor use, 14-16 % for outdoor use, and density of 760kg/m³ at 12 % moisture content. Total height of construction 40mm.

Installation in accordance with WTCB (BBRI) recommendations