


EUROPEAN OAK (PEFC-CERTIFIED)

PROFILE: REBATED FEATHER EDGE – RUSTIC MIX – RB2

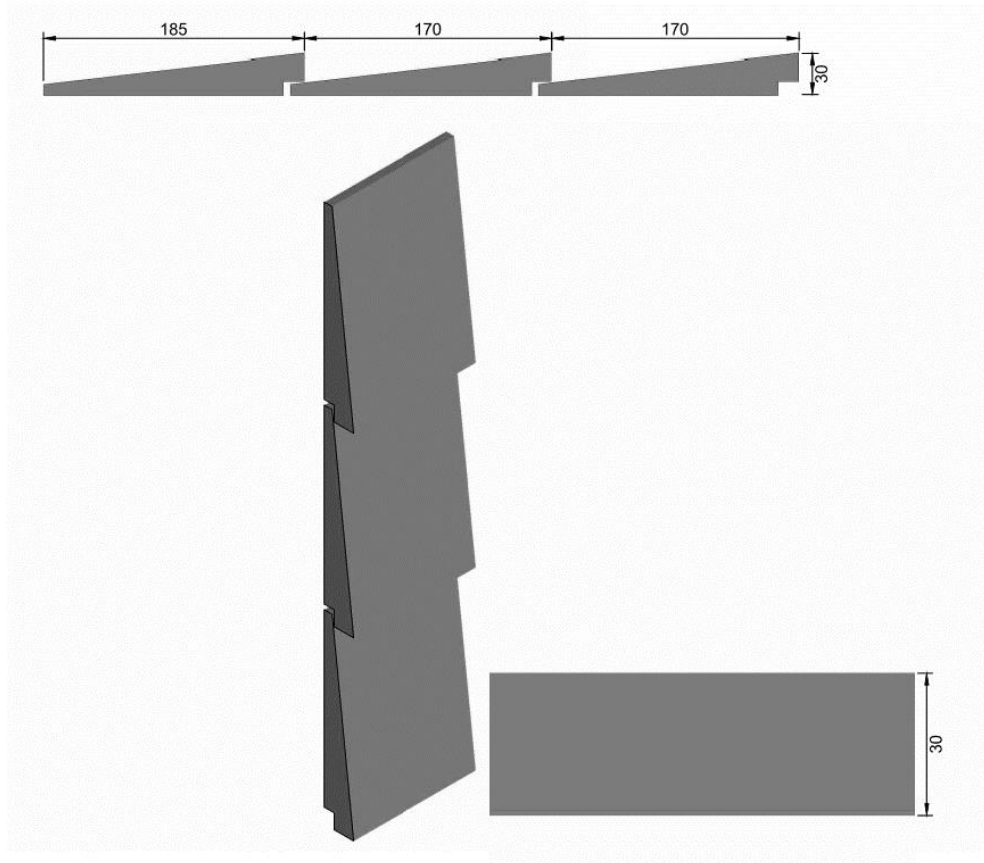

PROFILE DIMENSIONS

H 8/30 x W 185 x L 2500 | 2700 | 3000mm

Batten not included

H 20mm x W 50mm

TOTAL HEIGHT: 50mm (profile 30mm, batten 20mm)

DURABILITY CLASS 2 – 3 (Catas certificate available upon request)

Indoor use: 12 – 14 % moisture content

Outdoor use: 14 – 16 % moisture content

Density: 760kg/m³ at 12 % moisture content

Description:

Timber cladding in European oak, PEFC-certified, dimensions:

thickness: 8/30mm; width: 185mm.

European oak is durability class 2-3 timber with 12-14 % moisture content for indoor use, 14-16 % for outdoor use, and density of 760kg/m³ at 12 % moisture content. Total height of construction 50mm.

Installation in accordance with WTCB (BBRI) recommendations