


PYROCLIP

Application: For securing fire-retardant cladding boards

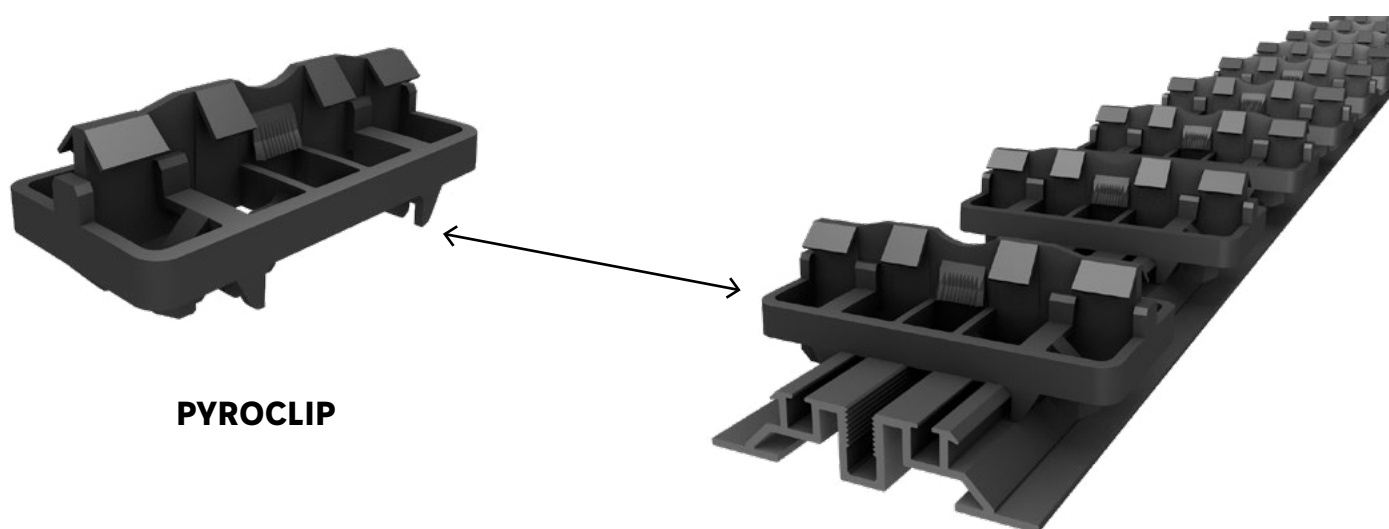

TECHNICAL CHARACTERISTICS

Material	Polybutylene terephthalate (PBT)
Density (kg/m ³)	1380
Colour	Noir
Tensile stress at yield (MPa)	40
Fusion temperature °C	225
Tensile modulus (MPa)	2000
Coefficient of linear expansion (10 ⁻⁶ /K)	190
Weight (g)	10,8

FLAMMABILITY CHARACTERISTICS

Burning behavior at thickness « h »	V-0 <i>The material self-extinguishes within 10 seconds of the flame being removed, without producing any flaming droplets. Highest possible rating.</i>
Thickness tested	0,8 mm
UL 94 Certification	Yes

Ref	Designation	Sales unit
3707	Pyroclip	700 units/carton

