


HOTWOOD BAMBOO

PROFILE: DECKING BOARD with QuickClip® – BAMQC

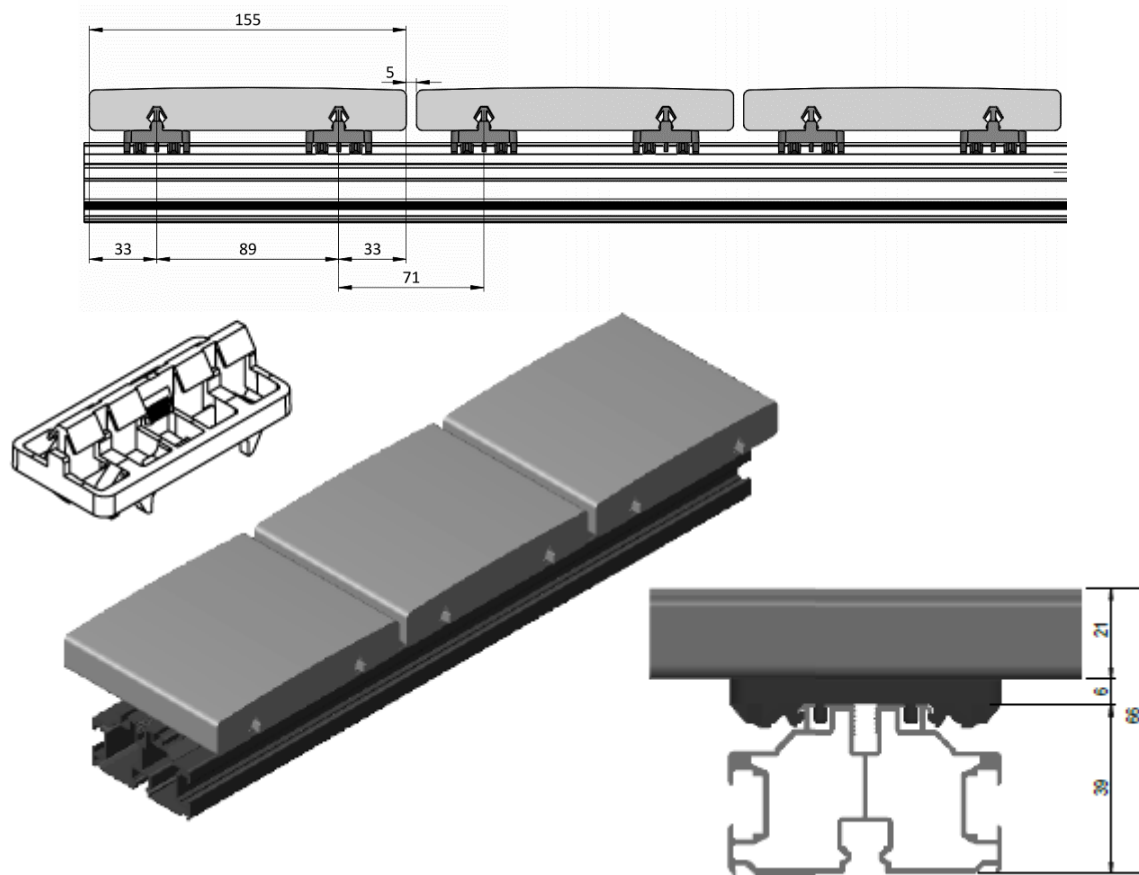

PROFILE DIMENSIONS

H 21 x W 155 x L ± 1850 mm

DIMENSIONS OF ALUMINIUM JOIST WITH PRE-MOUNTED CLIPS

H 39 x W 63 x L 3720mm

TOTAL HEIGHT: 66mm (profile 21mm + clip 6mm + alu joist 39mm)

DURABILITY CLASS 1

Bending strength: 54.4 | Modulus of elasticity: 13,565 | Density: 1150kg/m³ | Dimensional stability: length: + 0.1 %; width: + 0.9% (24 hours in water 20°C)

Description:

Timber decking in HOTwood bamboo, PEFC-certified, dimensions:

thickness: 21mm; width: 155mm, installed using Carpentier QuickClip® system.

Reverse side has 5.8mm x 11.8mm groove for easy installment of QuickClip® (polyoxymethylene).

HOTwood bamboo is durability class 1 timber with bending strength of 54.4, modulus of elasticity of 13,565 and density of 1150kg/m. All plastic clips are spaced according to profile and PRE-installed on a black painted aluminium rail, RAL9005, with the following dimensions: thickness 39mm, width 63mm and length 3720mm. Total height of construction 66mm.

Installation instructions: please request our separate document