


Horizontal HOTwood ash slat awning

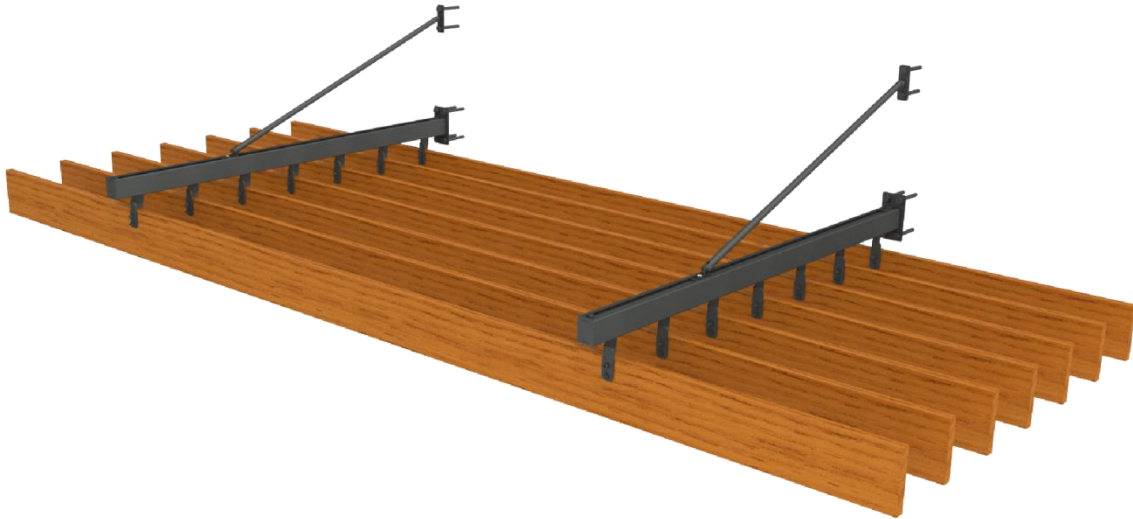

Technical characteristics

Suspension system consisting of metal supports finished with black texture paint

Wooden louvers

Wood type: HOTwood ash (thermally modified ash)

Certification: PEFC or FSC® (upon request)

Durability class: 1 (Catas certificate upon request)

Moisture content: 4-6%

Bending strength: 81.9

Modulus of elasticity: 15.68

Density: 603kg/m³

Width shrinkage for EMC 35 - 65%: 0.34%

Profile dimensions

