



INSTALLING THE RAILS ON A CURVED WALL


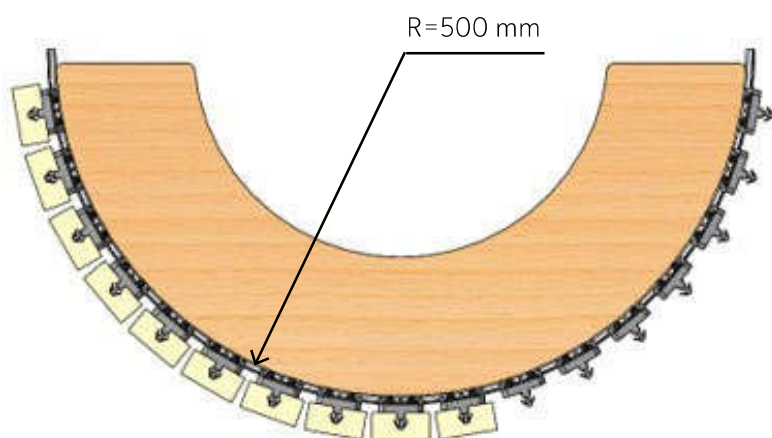


The Mini Rail enables manual bending up to a radius of 500 mm.

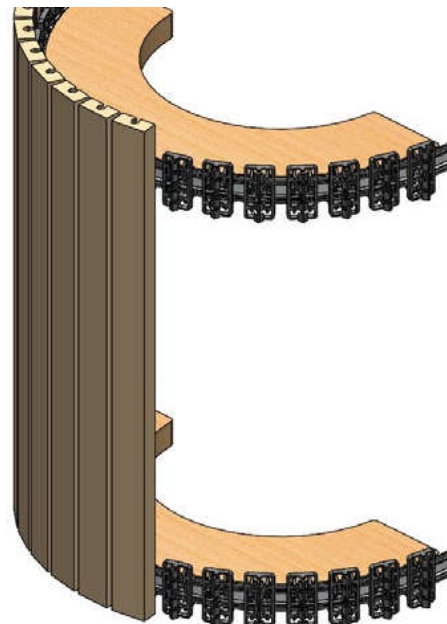

INSTALLATION

Start fastening the miniature rail at one end using suitable fasteners.
The spacing between fasteners must allow the miniature rail to be completely flush with the wall.

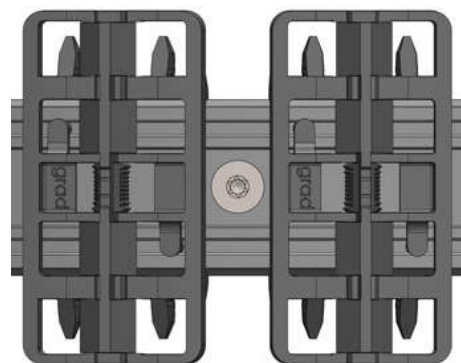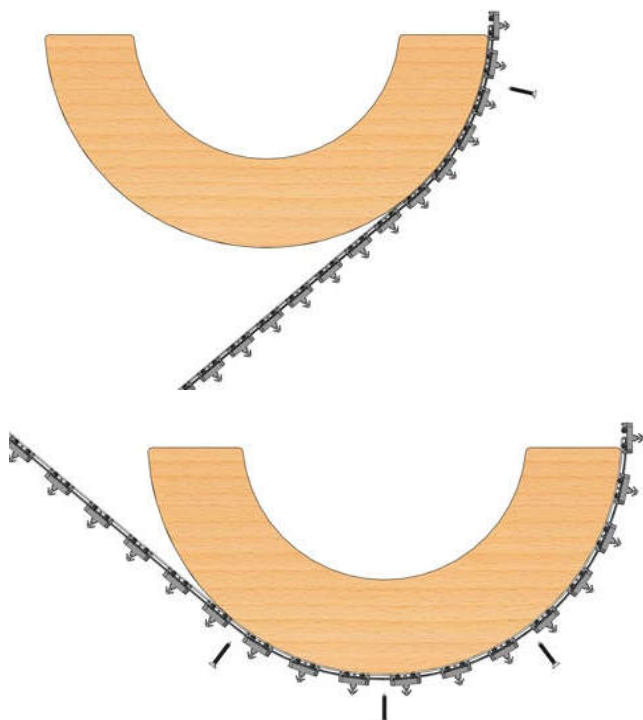

Adjust the screw spacing according to the radius of curvature, to ensure that the rail is held securely on the support.
Note: The mini-rail can be fastened with a nail gun.