




Accoya Color Grey Plus Line QuickClip® – SV+QC

interval of 4mm

Cladding
Panelling
Ceilings

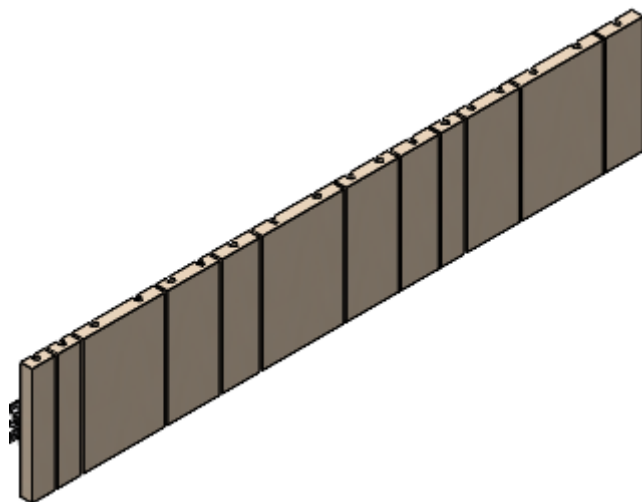

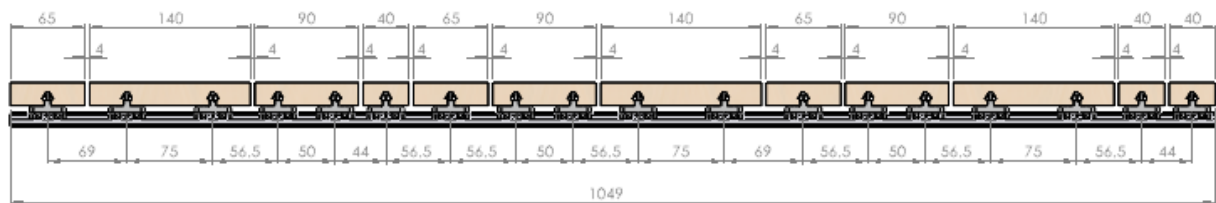

Technical specifications

Dimensions of boards	20mm (thickness) x 40 65 90 140mm (width) x ±3000mm/+
Dimensions of aluminium joist	12mm (thickness) x 55mm (width) x 3960mm
Total thickness	38mm (profile 20mm + clip 6mm + alu joist 12mm)
Gap between boards	4mm
Centre distance of boards	See diagram
Wood variety	Accoya
Certification	FSC® Mix 70% (upon request)
Durability class	1
Moisture content	3-5%
Bending strength	22N/mm ²
Modulus of elasticity	10kN/mm ²
Density	512kg/m ³
Width shrinkage for EMC 35-65%	1.5%

Installation system

QuickClip® cladding is delivered with the Grad® installation system.

Reverse side has a 5.8mm x 11.8mm groove into which Grad® clips (in polyoxymethylene, a plastic derivative) slot perfectly.

All plastic clips are pre-installed on a black painted aluminium rail. Their centre distance is always adapted to suit the profile.

Installation instructions: please request our separate document