

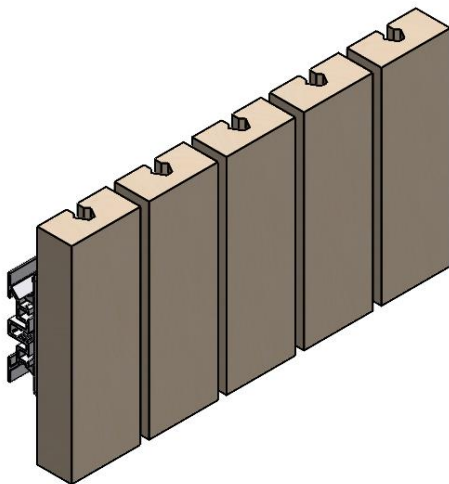


## Accoya Fine Line QuickClip® – SV3QC

interval of 5mm

Cladding  
Panelling  
Ceilings

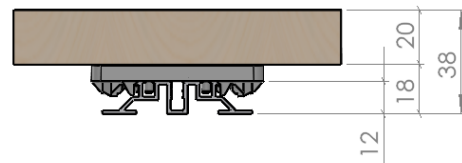

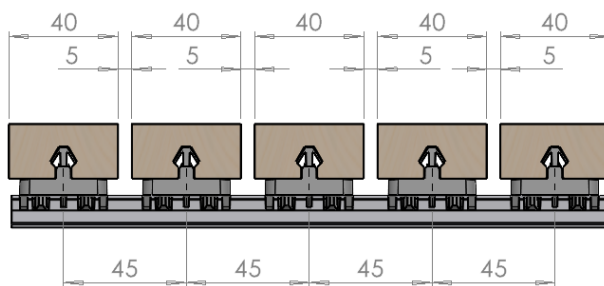

### Technical specifications

|                                |                                                   |
|--------------------------------|---------------------------------------------------|
| Dimensions of boards           | 20mm (thickness) x 40mm (width) x $\pm 3000$ mm/+ |
| Dimensions of aluminium joist  | 12mm (thickness) x 55mm (width) x 3960mm          |
| Total thickness                | 38mm (profile 20mm + clip 6mm + alu joist 12mm)   |
| Gap between boards             | 5mm                                               |
| Centre distance of boards      | 45mm                                              |
| Wood variety                   | Accoya                                            |
| Certification                  | FSC® Mix 70% (upon request)                       |
| Durability class               | 1                                                 |
| Moisture content               | 3-5%                                              |
| Bending strength               | 22N/mm <sup>2</sup>                               |
| Modulus of elasticity          | 10kN/mm <sup>2</sup>                              |
| Density                        | 512kg/m <sup>3</sup>                              |
| Width shrinkage for EMC 35-65% | 1.5%                                              |

### Installation system

QuickClip® cladding is delivered with the Grad® installation system.

Reverse side has a 5.8mm x 11.8mm groove into which Grad® clips (in polyoxymethylene, a plastic derivative) slot perfectly.

All plastic clips are pre-installed on a black painted aluminium rail. Their centre distance is always adapted to suit the profile.

***Installation instructions: please request our separate document***