



## HOTwood Clear Pine Piano QuickClip® PIAQC

Cladding  
Panelling  
Ceiling

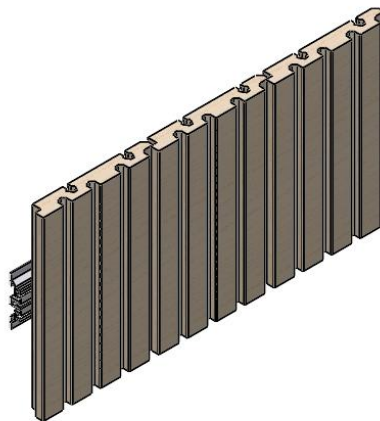

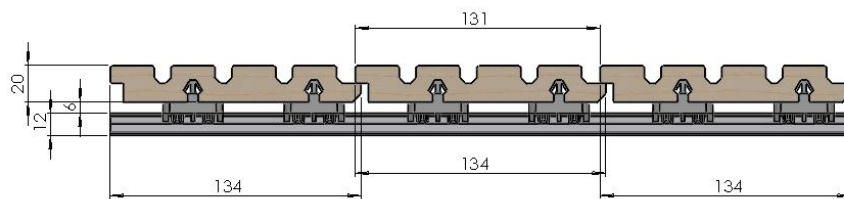

### **Technical specifications**

|                                |                                                            |
|--------------------------------|------------------------------------------------------------|
| Board dimensions               | 20mm (thickness) x 134mm (width) x $\pm 3000$ mm/+         |
| Aluminium joist dimensions     | 12mm (thickness) x 55mm (width)                            |
| Total thickness                | 38mm (profile 20mm + clip 6mm + aluminium joist 12 mm)     |
| Centre distance of boards      | 131mm                                                      |
| Coverage width                 | 131mm                                                      |
| Wood variety                   | HOTwood Clear Pine (thermally treated pine, free of knots) |
| Certification                  | PEFC                                                       |
| Durability class               | 1 (CATAS certificate available upon request)               |
| Moisture content               | 4-6%                                                       |
| Bending strength               | 81.9 N/mm <sup>2</sup>                                     |
| Modulus of elasticity          | 15.68 kN/mm <sup>2</sup>                                   |
| Density                        | 415,5 kg/m <sup>3</sup>                                    |
| Width shrinkage for EMC 35-65% | 0.39%                                                      |

### **Installation system**

QuickClip® cladding is delivered with the Grad® installation system. Reverse side has a 5.8mm x 11.8mm groove into which Grad® clips (in polyoxymethylene, a plastic derivative) slot perfectly. All plastic clips are pre-installed on a black painted aluminium rail. Their centre distance is always adjusted to suit the profile.

***Installation instructions: please request our separate document***