



HOTwood Clear Pine
Shiplap QuickClip®
S3QC



Cladding
Panelling
Ceiling

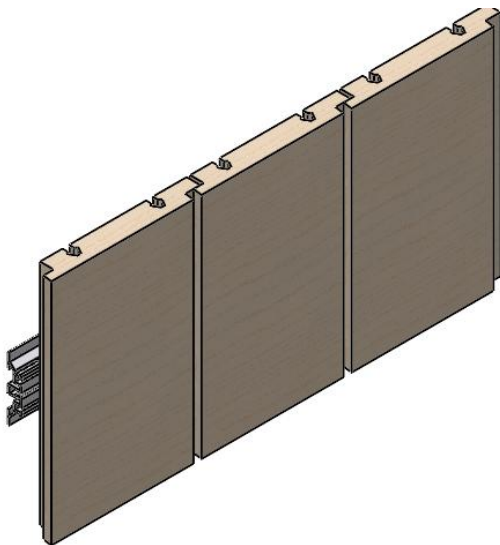

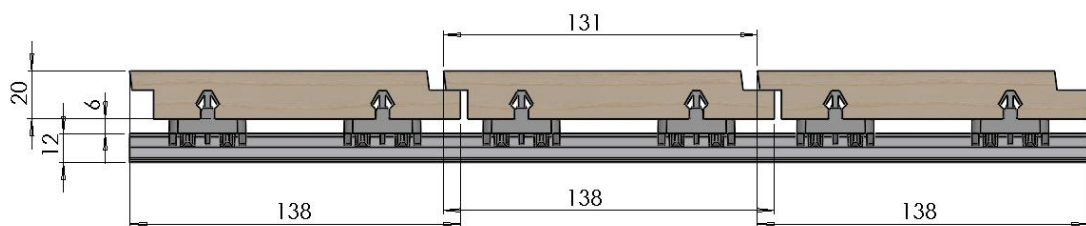

Technical specifications

Board dimensions	20 mm (thickness) x 138 mm (width) x $\pm$ 3000 mm/+
Aluminium joist dimensions	12 mm (thickness) x 55 mm (width)
Total thickness	38 mm (profile 20mm + clip 6 mm + alu joist 12 mm)
Centre distance of boards	131 mm
Coverage width	131 mm
Wood variety	HOTwood Clear Pine (thermally treated pine, free of knots)
Certification	PEFC
Durability class	1 (CATAS certificate available upon request)
Moisture content	4-6%
Bending strength	81.9 N/mm ²
Modulus of elasticity	15.68 kN/mm ²
Density	415,5 kg/m ³
Width shrinkage for EMC 35-65%	0.39%
Reaction to fire	Class D-s2-d0 (EN 13501-1)

Installation system

QuickClip® cladding is delivered with the Grad® installation system. Reverse side has a 5.8mm x 11.8mm groove into which Grad® clips (in polyoxymethylene, a plastic derivative) slot perfectly. All plastic clips are pre-installed on a black painted aluminium rail. Their centre distance is always adjusted to suit the profile.

Installation instructions: please request our separate document