



HOTwood ash Triple – TRIP

Cladding
 Panelling
 Ceiling

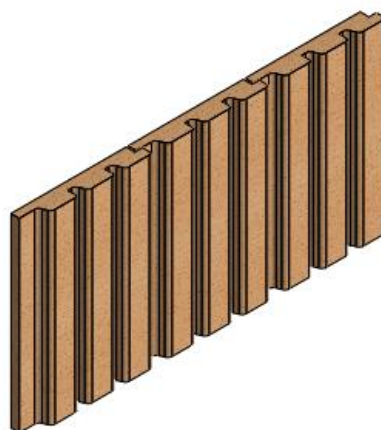

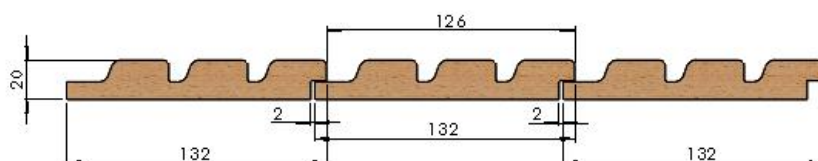

Technical specifications

Board dimensions	20mm (thickness) x 132mm (width) x ± 1500 mm/+
Batten not included	22mm (thickness) x 45mm (width)
Total thickness	42mm (profile 20mm + batten 22mm)
Centre distance of boards	134mm
Coverage width	126mm
Wood variety	HOTwood ash (thermally treated ash)
Certification	PEFC
Durability class	1 (CATAS certificate available upon request)
Moisture content	4-6%
Bending strength	81.9N/mm ²
Modulus of elasticity	15.68kN/mm ²
Density	603kg/m ³
Width shrinkage for EMC 35-65%	0.34%

Installation

Installation in accordance with Buildwise (formerly WTCB-CSTC) recommendations

Please note: HOTwood may expand slightly in humid conditions. For this reason, always allow at least 2mm for this expansion when installing closed profiles.