



HOTwood bamboo Plus Line Closed SV+

Cladding

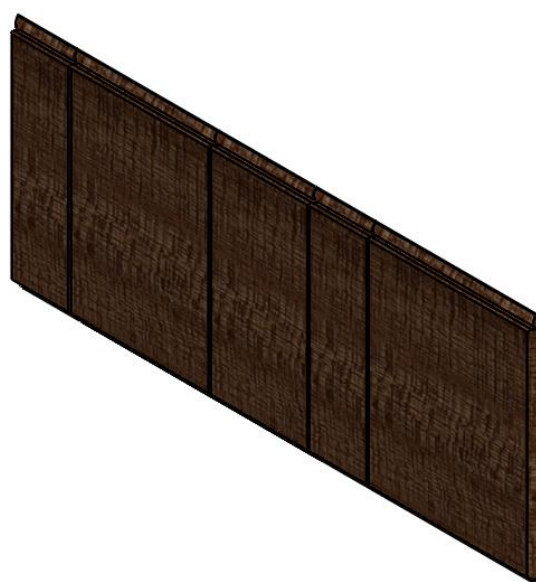

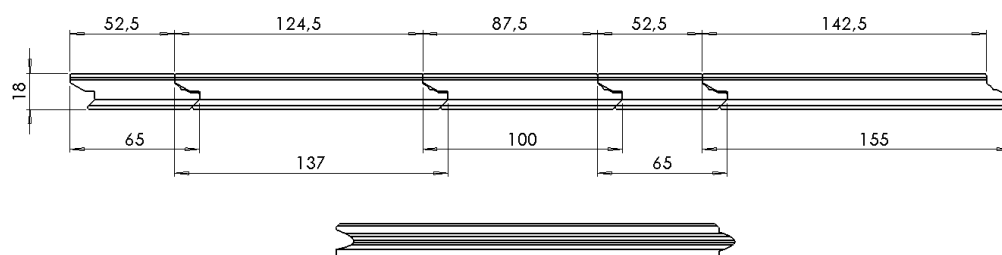

Technical specifications

Board dimensions	18mm (thickness) x 65 100 137 155mm (width) x 1850mm
Batten not included	22mm (thickness) x 45mm (width)
Total thickness	40mm (profile 18mm + batten 22mm)
Centre distance of boards	See diagram
Coverage width	See diagram
Wood variety	HOTwood bamboo (thermally treated bamboo)
Certification	FSC® (on demand)
Durability class	1
Bending strength	84.4 N/mm ²
Modulus of elasticity	17.366 kN/mm ²
Density	1150 kg/m ³
Dimensional stability	Length: + 0.1%; width: + 0.9% (24 hours in water 20°C)
Reaction to fire	Class B-s1-d0 (EN 13501-1)

Installation

Installation in accordance with Buildwise (formerly WTCB-CSTC) recommendations

Please note: HOTwood may expand slightly in humid conditions. For this reason, always allow at least 2mm for this expansion when installing closed profiles.