
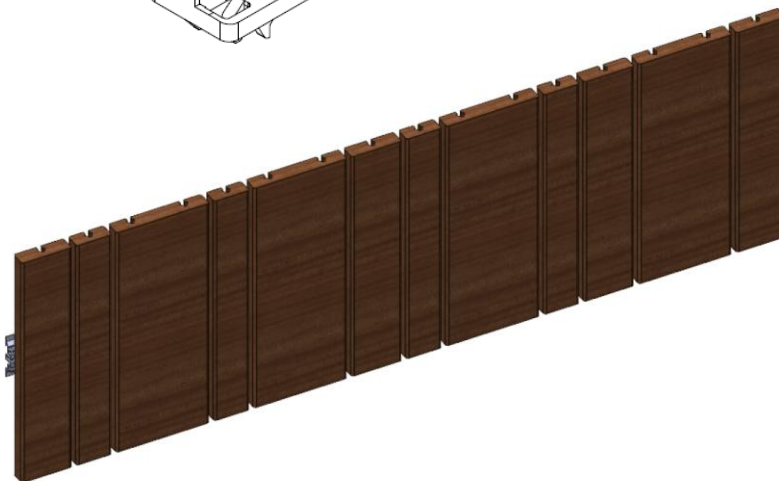
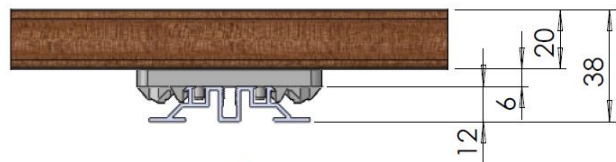



HOTwood bamboo Plus Line QuickClip® – SV+QC

interval of 6mm

Cladding

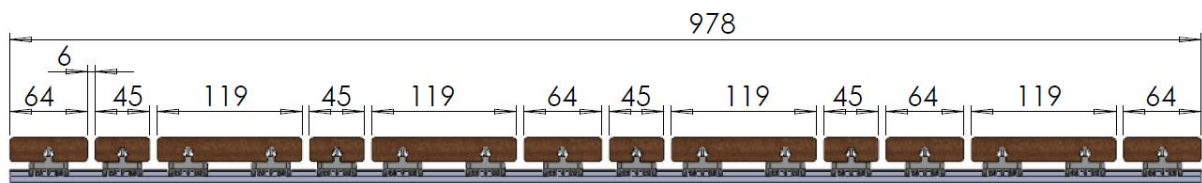

The pattern appears twice on the profile as a mirror image



Technical specifications

Board dimensions	20mm (thickness) x 45 64 119mm (width) x ± 1850mm
Aluminium joist dimensions	12mm (thickness) x 55mm (width) x 1962mm
Total thickness	38 mm (profile 20mm + clip 6mm + aluminium joist 12mm)
Gap between boards	6 mm
Centre distance of boards	See diagram
Wood variety	HOTwood bamboo (thermally treated bamboo)
Certification	FSC® (on demand)
Durability class	1
Bending strength	84.4 N/mm ²
Modulus of elasticity	17.366 kN/mm ²
Density	1150 kg/m ³
Dimensional stability	Length: + 0.1%; width: + 0.9% (24 hours in water 20°C)
Reaction to fire	NPD

Installation system

QuickClip® cladding is delivered with the Grad® installation system. Reverse side has a 5.8mm x 11.8mm groove into which Grad® clips (in polyoxymethylene, a plastic derivative) slot perfectly. All plastic clips are pre-installed on a black painted aluminium rail. Their centre distance is always adjusted to suit the profile.

Installation instructions: please request our separate document