



**HOTwood pine**  
**T&G Plank**  
**N1**

Cladding

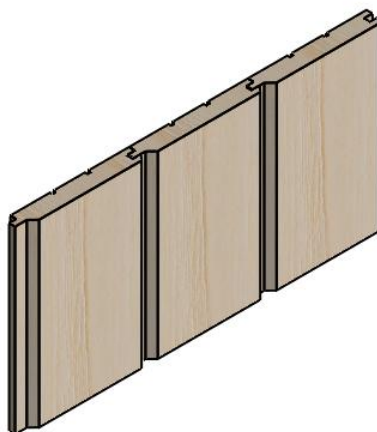

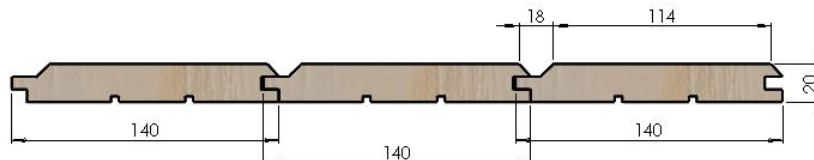

### Technical specifications

|                               |                                                      |
|-------------------------------|------------------------------------------------------|
| Board dimensions              | 20 mm (thickness) x 140 mm (width) x $\pm$ 2700 mm/+ |
| Batten not included           | 22 mm (thickness) x 45 mm (width)                    |
| Total thickness               | 42 mm (profile 20 mm + batten 22 mm)                 |
| Centre distance of boards     | 132 mm                                               |
| Wood variety                  | HOTwood pine (thermally treated pine)                |
| Certification                 | PEFC                                                 |
| Durability class              | 1-2 (CATAS certificate available upon request)       |
| Moisture content              | 4-6%                                                 |
| Bending strength              | 17.41 N/mm <sup>2</sup>                              |
| Modulus of elasticity         | 3.44 kN/mm <sup>2</sup>                              |
| Density                       | 415.5 kg/m <sup>3</sup>                              |
| Width shrinkage for EMC 35-6% | 0.39%                                                |
| Reaction to fire              | Class D-s2,d0 (EN 13501-1)                           |

### Installation

Installation in accordance with Buildwise (formerly WTCB-CSTC) recommendations

*Please note: HOTwood may expand slightly in humid conditions. For this reason, always allow at least 2mm for this expansion when installing closed profiles.*