



HOTwood pine
Jump Line – Brushed Black
SV4

Cladding
Panelling
Ceilings

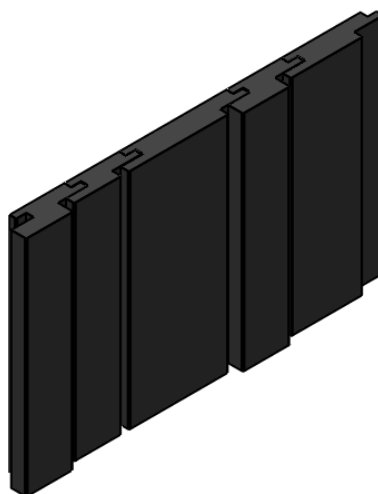

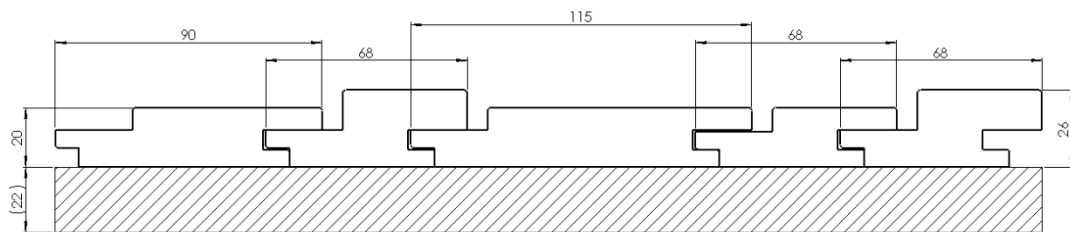

Technical specifications

Board dimensions	20 mm (thickness) x 90 mm (width) 26 mm (thickness) x 68 mm (width) 20 mm (thickness) x 115 mm (width) 20 mm (thickness) x 68 mm (width) 26 mm (thickness) x 68 mm (width) x $\pm$ 3000 mm/+
Batten not included	22 mm (thickness) x 45 mm (width)
Total thickness	42 48 mm (profile 20 26 mm + batten 22 mm)
Centre distance of boards	60 72,5 72,5 49 mm
Coverage width	See diagram
Wood variety	HOTwood pine (thermally treated pine)
Certification	PEFC
Durability class	1-2 (CATAS certificate available upon request)
Moisture content	4-6%
Bending strength	17.41 N/mm ²
Modulus of elasticity	3.44 kN/mm ²
Density	415.5 kg/m ³
Width shrinkage for EMC 35-6%	0.39%
Reaction to fire	Class D-s2,d0 (EN 13501-1)

Installation system

Installation in accordance with Buildwise (formerly WTCB-CSTC) recommendations

Please note: HOTwood may expand slightly in humid conditions. For this reason, always allow at least 2mm for this expansion when installing closed profiles.