



Kebony Decking board QuickClip® – KEBQC

interval of 5mm

Decking



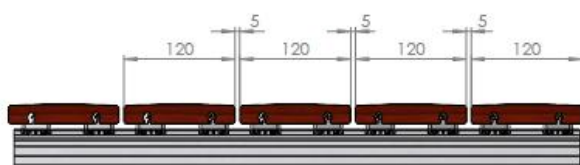

Technical specifications

Dimensions of boards	21 mm (thickness) x 120 mm (width) x $\pm$ 3000 mm/+
Dimensions of aluminium joist	39 mm (thickness) x 63mm (width) x 3720 mm
Total thickness	66 mm (profile 21 mm + clip 6 mm + alu joist 39 mm)
Gap between boards	5 mm
Centre distance of boards	125 mm
Wood variety	Kebony
Certification	PEFC or FSC® (upon request)
Durability class	1-2
Moisture content	4-6%
Density	637 kg/m ³
Width shrinkage for EMC 35-6%	4%

Installation system

QuickClip® decking is delivered with the Grad® installation system.

Reverse side has a 5.8 mm x 11.8 mm groove into which Grad® clips (in polyoxymethylene, a plastic derivative) slot perfectly.

All plastic clips are pre-installed on a black painted aluminium rail. Their centre distance is always adapted to suit the profile.

Installation instructions: please request our separate document