



**HOTwood Clear Pine
 Jump Line - Brushed
 SV4**

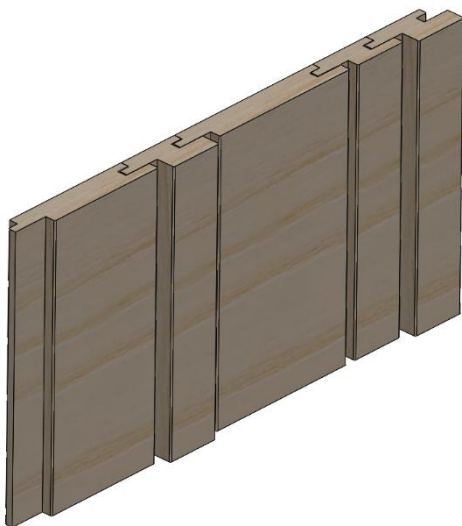

Cladding
 Panelling
 Ceiling

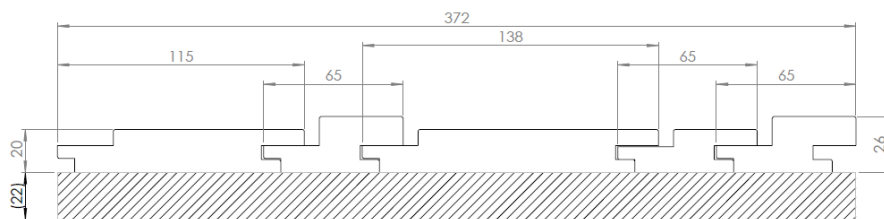

Technical specifications

Board dimensions	20 mm (thickness) x 115 mm (width) 26 mm (thickness) x 65 mm (width) 20 mm (thickness) x 138 mm (width) 20 mm (thickness) x 65 mm (width) 26 mm (thickness) x 65 mm (width) x ± 3000 mm/+
Batten not included	22 mm (thickness) x 45 mm (width)
Total thickness	42 48 mm (profile 20 26 mm + batten 22 mm)
Centre distance of boards	71 82,5 82,5 46 mm
Coverage width	See diagram
Wood variety	HOTwood Clear Pine (thermally treated pine, free of knots)
Certification	PEFC
Durability class	1 (CATAS certificate available upon request)
Moisture content	4-6%
Bending strength	81.9 N/mm ²
Modulus of elasticity	15.68 kN/mm ²
Density	415.5 kg/m ³
Width shrinkage for EMC 35-65%	0.39%
Reaction to fire	Class D-s2,d0 (EN 13501-1)

Installation

Installation in accordance with Buildwise (formerly WTCB-CSTC) recommendations

Please note: HOTwood may expand slightly in humid conditions. For this reason, always allow at least 2mm for this expansion when installing closed profiles.